

### ESD 16/2.4 I

#### Percussion Diamond Core Drill

Rated Voltage (V) : 230  
 Power Input (W) : 1100  
 Frequency : 50 - 60 Hz  
 Max. Drilling Diameter (mm) : 162 (Brickwork)  
 Spindle Connection : 1/2"  
 No Load Speed (RPM) : 1500/2800  
 Rated Speed (RPM) : 0-1100 / 0-2050  
 Weight (Kg) : 3.2



### EPF 1503

#### Scouring Machine

Power Input (W) : 1500  
 Rated Voltage (V) : 230  
 Rated Speed (RPM) : 4000  
 Milling Head (mm) : 140  
 Depth Adjustment (mm) : 0.5 - 4.0  
 Spindle Connection : M 14 Male  
 Weight (Kg) : 3.9



### UKF 1500

#### Bevelling Machine

Power Input (W) : 1500  
 No Load Speed (RPM) : 6000  
 Max Bevel Height (mm) : 0 to 6  
 Chamfer Angle : 45°  
 Min. Dia. for Inside Bevel (mm) : 20mm  
 Weight (Kg) : 4.6



### KDB 350

#### Diamond Core Drilling Unit

Power Input (W) : 3000  
 Rated Voltage (V) : 230  
 Rated Speed (RPM) : 230/500/1030  
 Drilling Diameter (mm) : 42-352  
 Spindle Connection : 1 1/4" Male  
 Column Length (mm) : 995  
 Hub (mm) : 620  
 Weight Drilling Unit (Kg) : 35.0



### EZR 22 R R/L SET

#### Contra Twin Stirrer

Power Input (W) : 1300  
 Rated Voltage (V) : 230  
 Rated Speed (RPM) : 140 - 400  
 Total Diameter Rods (mm) : 220  
 Spindle Connection : Special  
 Weight (Kg) : 6.7



### AUTOMIX 1801

#### The Mobile Mixing Station

Power Input (W) : 1500  
 Rated Voltage (V) : 230  
 Rated Speed (RPM) : 50  
 No Load Speed (RPM) : 115  
 Bucket Size : 65 l  
 Speed Connection : M 20 Female  
 Weight (Kg) : 26.5



### VC 30

#### Wet & Dry Vacuum Cleaner 30L

Input Power : 1200 W  
 Rated Voltage : 220 V - 240 V  
 Tank Material : Stainless Steel  
 Vacuum : 17 Kpa  
 Container Capacity : 30 L



### VC 38

#### Wet & Dry Vacuum Cleaner 38L Heavy Duty

Input Power : 1400 W  
 Rated Voltage : 220 V - 240 V  
 Tank Material : Stainless Steel  
 Vacuum : 17 Kpa  
 Container Capacity : 38 L




### TCT Cutter



#### Specification :

- Shank Type : Weldon
- Dimension Range : 12mm to 100mm
- Length : 35mm, 50mm, 75mm & 100mm

### Blades

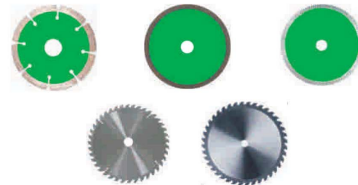

### Professional Metal Chuck

#### Specification :

- 10 mm Chuck 3/8-24UNF Steel Nut
- 10 mm Chuck 1/2-2UNF Steel Nut
- 13 mm Chuck 1/2-20UNF Steel Nut



### Concrete Core Bit

- Dimension :  $\varnothing$  1" to 8"
- Length : 450mm
- Spindle connection : 1 1/4" UNC



Authorised Dealer

RAVI GUPTA



#### TECHCRAFT ENGINEERING SOLUTIONS

481, Ground Floor, Pocket-2, Paschim Puri, Near Punjabi Bagh Club Road, New Delhi-110063  
 M. : +91-8800823930, 8700759680  
 E. : techcraftsales@gmail.com

Manufactured, Marketed & Serviced By :



Eibenstock Positron Elektrowerk Pvt. Ltd.

Works : Plot No. 144, 1/2/3, Kallappa Awade Textile Park, Industrial Estate, Tardal, Tal. Hatkanangle, Dist. Kolhapur, Maharashtra (INDIA)  
 T : +91 7028919491, +91 7028919492

CCO : Suyash Shroff, Office No. 19, 3rd Floor, Sr. No. 74+75/2/1, Baner Road, Baner, Pune - 411045, Maharashtra (India)

E-mail : sales@eibenstock.in  
 Website : www.ep-india.in



**EIBENSTOCK  
 POSITRON**



**CATALOGUE**

GERMAN ENGINEERING

मेड इन इंडिया

**KBM 35I**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 900  
 Core Cutting Capacity (mm) : 12 to 35  
 Core Cutting Depth (mm) : 50  
 Rated speed (rpm) : 400  
 Twist Drill Capacity (mm) : Ø 10  
 Weight (Kg) : 10.5



**KBM 38**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 900  
 Core Cutting Capacity (mm) : 12 to 38  
 Core Cutting Depth (mm) : 50  
 Rated speed (rpm) : 450  
 Weight (Kg) : 10.5



**KDS 42**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1152  
 Core Cutting Capacity (mm) : 12 - 42  
 Core Cutting Depth (mm) : 50  
 Rated speed (rpm) : 450 / 250  
 Twist Drill Capacity (mm) : Ø 22  
 Direct Arbor : 19 mm weldon  
 Morse Taper : MT 2  
 Weight : 21



**KBM 42 - 2**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1100  
 Core Cutting Capacity (mm) : 12 to 42  
 Core Cutting Depth (mm) : 50  
 Rated speed (rpm) : 450 / 250  
 Weight (Kg) : 17.5  
 Twist Drill Capacity (mm) : 22



**KBM 42R/RL**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1150  
 Core Cutting Capacity (mm) : 12 - 50  
 Core Cutting Depth (mm) : 50  
 Rated speed (rpm) : 100-250 / 180-450  
 Twist Drill Capacity (mm) : Ø 22  
 Direct Arbor : 19 mm weldon  
 Morse Taper : MT 2  
 Weight : 12.7



**KBM 42I**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1150  
 Core Cutting Capacity (mm) : 12 - 50  
 Core Cutting Depth (mm) : 50  
 Rated speed (rpm) : 250 / 450  
 Twist Drill Capacity (mm) : Ø 22  
 Direct Arbor : 19 mm weldon  
 Morse Taper : MT 2  
 Weight : 12.5



**KBM 50 - 2**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1100  
 Core Cutting Capacity (mm) : 12 to 50  
 Core Cutting Depth (mm) : 50  
 Rated speed (rpm) : 450 / 250  
 Weight (Kg) : 17.5



**KDS 85-3**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1800  
 Core Cutting Capacity (mm) : 85  
 Core Cutting Depth (mm) : 75  
 Rated speed (rpm) : 110/190/280  
 Twist Drill Capacity (mm) : Ø 32  
 Direct Arbor : 32 mm weldon  
 Morse Taper : MT 3  
 Weight : 29



**KBM 85-4E REL**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1700  
 Core Cutting Capacity (mm) : 85  
 Core Cutting Depth (mm) : 75  
 Rated speed (rpm) : 385/245/175/110  
 Direct Arbor : 32 mm Weldon  
 Twist Drill Capacity (mm) : Ø 32  
 Morse Taper : MT3  
 Weight (Kg) : 26.5



**KDS 100 - 4RL**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1800  
 Core Cutting Capacity (mm) : 100  
 Core Cutting Depth (mm) : 100  
 Rated speed (rpm) : 60-140/200-470  
 Morse Tapping : MT3  
 Tapping Capacity : up to M 24 mm  
 Electro Torque Control : Yes  
 Thermal Overload Protection : Yes  
 Weight (Kg) : 36



**KBM 130**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 2300  
 Cutting Capacity (mm) : Core Drill Short 12 to 130  
 : Core Drill Long 12 to 100  
 : Core Drill Extra long 20 to 120  
 Core Cutting Depth (mm) : 110  
 Rated speed (rpm) : 30 to 85 min -1  
 : 50 to 135 min -1  
 : 130 to 390 min -1  
 : 210 to 620 min -1  
 Weight (Kg) : 50  
 Tapping Capacity : up to M42 mm  
 Electro Torque Control : Yes  
 Thermal Overload Protection : Yes  
 \* Twist drilling : Capacity (Max) : 45 mm  
 \* Reaming : (Max) : 50 mm  
 \* Morse taper : MT 4  
 \* Direct arbor : 32 mm Weldon



**WBM 40**

**Magnetic Core Drilling Machine**

Input supply voltage (V) : 220-240  
 Motor Input (W) : 1300  
 Core Cutting Capacity (mm) : 12 - 40  
 Core Cutting Depth (mm) : 25  
 Rated speed (rpm) : 320  
 Direct Arbor : 19 mm weldon  
 Weight : 12.1



**PDB 200**

**Diamond Core Drilling Machine**

Input Supply Voltage : 220-240 V  
 Motor Input : 2500 W  
 Core Cutting Capacity : 200 mm  
 Stroke : 490 mm  
 Rated Speed : 450 RPM  
 Mechanical Safety Clutch : Available  
 Spindle Connection : 1 1/4" UNC  
 Weight : 14 Kg



**PDB 250**

**Diamond Core Drilling Machine**

Input Supply Voltage : 220-240 V  
 Motor Input : 2500 W  
 Core Cutting Capacity : 250 mm  
 Stroke : 500 mm  
 Rated Speed : 360 / 850 RPM  
 Mechanical Safety Clutch : Available  
 Spindle Connection : 1 1/4" UNC  
 Weight : 24 Kg



**EPD 10**

**Plain Drill**

Rated Voltage : 220-240 V  
 Power Input : 650 W  
 No Load Speed : 0-1200 min<sup>-1</sup>  
 Drilling Capacity in Steel : 10 mm  
 Drilling Capacity in Aluminium : 13 mm  
 Drilling Capacity in Wood : 20 mm  
 Weight : 1.8 Kg  
 Chuck : 1.5-10 mm



**EHD 13-1/13-2**

**Single / Double Speed Hammer Drill**

Rated Voltage : 220-240 V  
 Power Input : 650 W  
 No Load Speed : 0-1200/3000 min<sup>-1</sup>  
 Drilling Capacity in Concrete : 13/15 mm  
 Drilling Capacity in Brick & Tile : 13/15 mm  
 Drilling Capacity in Steel : 10/13 mm  
 Drilling Capacity in Aluminium : 15 mm  
 Drilling Capacity in Wood : 30 mm  
 Weight : 1.9 / 2.1 Kg  
 Chuck : 1.5-13 mm



**EBH-2-18 RE**

**Rotary Hammer Drill 18 mm**

Rated Voltage : 230 V  
 Power Input : 650 W  
 No Load Speed : 0-1600 RPM  
 Drilling Capacity in Concrete : 18mm  
 Drilling Capacity in Steel : 13mm  
 Drilling Capacity in Wood : 20mm  
 Weight : 2.1 Kg



**EZW 125 I**

**Angel Grinder 125 mm**

Rated Voltage (V) : 220 - 240  
 Power Input (W) : 1400  
 No Load Speed (RPM) : 11,000  
 Grinding Disk Diameter (mm) : 125  
 Thread of Work Spindle : M 14  
 Weight (Kg.) : 3.1



**EBS 125 I**

**Concrete Grinder 125 mm**

Rated Voltage (V) : 220 - 240  
 Power Input (W) : 1400  
 No Load Speed (RPM) : 9,500  
 Grinding Disk Diameter (mm) : 125  
 Thread of Work Spindle : M 14  
 Weight (Kg.) : 3.2



**EZW 100**

**Angle Grinder**

Power Input (W) : 750  
 Rated Voltage : 230-240 V  
 No Load Speed (RPM) : 12,000  
 Max Disc (mm) : 100  
 Weight (Kg.) : 2.1



**EST 355 I**

**Chop Saw**

Rated Voltage (V) : 220 - 240  
 Power Input (W) : 2300  
 No Load Speed (RPM) : 4000  
 Cut off Wheel Diameter (mm) : 355  
 Weight (Kg.) : 17



**ETC 125 E1 & E2**

**Super Cutter Machine**

Rated Voltage (V) : 220 - 240  
 Power Input (W) : 1250  
 No Load Speed (RPM) : 12,500  
 Max Disc Diameter (mm) : 125  
 Max Cutting Depth (mm) : 39.5  
 Bevel Cutting Angle : 0 - 45°  
 Weight (Kg.) : 2.9



**EB 600**

**Electric Air Blower 600W**

Input Power : 600 W  
 Rated Voltage : 220 V - 240 V  
 No Load Speed : 16000 rpm  
 Air Volume : 4.0 m<sup>3</sup>/min  
 Weight (Kg.) : 1.6



**MXT 100/100-2**

**The Versatile Stirrer up to 50 Kg**

Rated Voltage : 220-240 V  
 Power Input : 1100 W  
 Rated Speed : 0 - 580 / 0 - 230 / 0 - 410 rpm  
 Max. Basket Diameter : 140 mm  
 Spindle Connection : M 14 i  
 Weight (Kg.) : 4 / 4.5

